


SCHMIDT & BENDER

MORE THAN A RIFLESCOPE

5-25x56 PM II PSR PRECISION SNIPER RIFLE

LIMITED EDITION

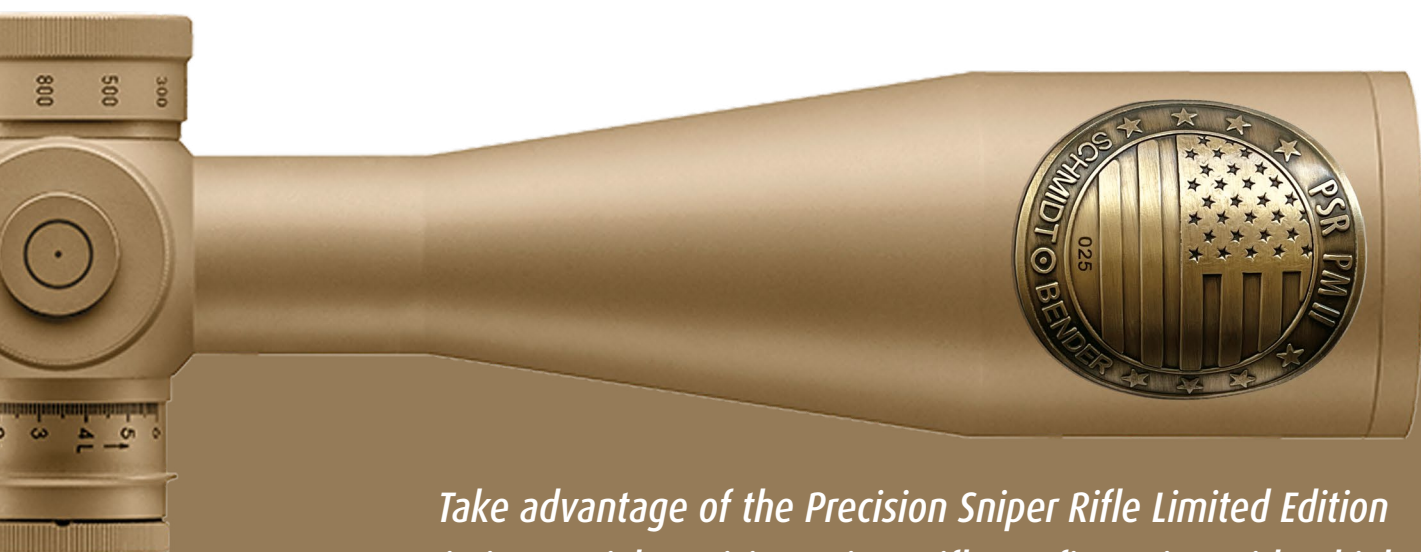

Take advantage of the Precision Sniper Rifle Limited Edition in its special Precision Sniper Rifle configuration with a high quality numbered badge.

- 5-25x56 PM II LP LT CM CCW
- TREMOR2 RETICLE
- SPECIAL PRECISION SNIPER RIFLE CONFIGURATION



Information about all products can be found on our website: www.schmidt-bender.com

5-25x56 PM II PSR Limited Edition

1. Dimensions and weight

Length (mm/in):	417/16.42
Main tube diameter (mm/in):	34/1.34
Weight (g/oz):	1158/40.85

2. Optical data

Magnification:	5-25
Objective diameter (mm)/(in):	56/2.20
Field-of-view (m/100 m)/(ft/100 yd):	5.3-1.5/15.9-4.5
Field-of-view (°):	3.0-0.9
Exit pupil diameter (mm/in):	11.0-2.3/0.43-0.09
Eye relief distance (mm)/(in):	90/3.54
Twilight factor:	16.7-37.4
Transmission (%):	90
Focal Plane:	1
Diopter adjustment (dpt):	-3 to +2
Parallax adjustment (m/yd):	10 to ∞/10.94 to ∞

3. Further data

Internal travel elevation:	30,8 MRAD
Internal travel windage:	15,3 MRAD
Illumination:	11 settings
Battery type:	CR2032
Nitrogen filling:	Minimum Nitrogen 5.0

4. Compatibility

Throw Lever compatible:	No
Thread ocular:	-
Thread objective:	M58.2x0.75

5. Options


Color:	RAL 8000
Temperature - Storage (°C)/(°F):	-55 to +70/-67 to +158
Temperature - Function (°C)/(°F):	-40 to +60/-40 to +140
Waterproof (m)/(ft):	3/9.84

6. Turret configurations

Turrets (Elevation / Windage)	Adjustment range elevation	Adjustment range windage	Turret rotation	Click value
DT LT / ST ZC LT	26 MRAD	±6 MRAD	ccw	0.1 MRAD

7. Reticles

First Focal Plane



TREMOR2

Legend

DT = Double Turn ST = Single Turn LT = Locking Turret ZC = Zero Click cw = clockwise ccw = counterclockwise 0.1 mrad = 1 cm/100 m

All data subject to change.

SCHMIDT BENDER

Schmidt & Bender GmbH & Co. KG | Am Grossacker 42 | 35444 Biebertal, Germany | P: +49(0) 6409 - 8115-0 | info@schmidt-bender.de | www.schmidt-bender.com